

Khosrow-Pour, M. (2017), *Encyclopedia of Information Science and Technology*, 4th edition, Pennsylvania (U.S.A.), IGI-Global.

Geographical Information Systems: the past, present and future

Paula Remoaldo

University of Minho, Portugal

Vítor Ribeiro

University of Minho, Portugal

Hélder Lopes

University of Minho, Portugal

Sara Silva

University of Minho, Portugal

INTRODUCTION

The main challenges of the XXI century are caused by the large amount of geospatial information through a GIS. Throughout time there have been many attempts to define Geographic Information Systems (GIS). Yet there is still no consensus on its definition and to restrict it to one is limited. In the acronym - Geographic Information Systems - geographic refers to the Earth's surface and near-surface, therefore, all human production and activity, as well as non-human are possible to spatialize using GIS.

GIS is recognized as an analytical and decision-making tool with many uses in different fields. It is used in many industries including, commercial, educational and/ or governmental. It is a powerful tool for land administration, statistical mapping, transport, network and environment management, remote sensing images, water/waste management, maintenance and management of public lighting, regional and urban planning, tourism planning, healthcare planning and/ or crime and security management.

In broad terms GIS is a special class of information systems that keeps track not only of events, activities, and things, but also their location. Computerization has opened up a vast new potential in the way people communicate, analyze ones surroundings and make decisions. The available data represents layers of the

real world that can be stored, processed and presented later to answer future needs (Bernhardsen, 2002).

In the process of acquisition, processing and spatial representation there is the involvement of multiple inputs and outputs that can be managed on databases, which invariably seek analytical and graphical spatial embodiments. In the graphical display, vector or raster elements can be chosen, depending on the degree of the database's specificity and the type of results expected.

These databases can be collected at different scales, using a plurality of data types, including population census, aerial photography or satellite imagery. It allows one to address multiple operating phases in the process of planning management on a multi-scale perspective with the challenge of discovering more effective and efficient solutions. Due to this nowadays, it is frequently used as a support system for spatial decision making (SDSS) (Crossland, 2005).

A well-designed GIS should be able to provide a good computer system, whereas, traditional GIS are intended for users operating on local servers. Traditionally, GIS includes hardware and software. The hardware are the physical parts of the computer itself and its associated peripherals (e.g. plotters and printers); while the software is interoperable, supporting the many available data formats (in the life cycle's infrastructure) and its implementation may be custom-designed for an organization.

Even so, GIS may be divided into two groups, typically known as "GIS carriers" and "GIS users", which are responsible for the management and analysis. The heart of GIS technology is its ability to conduct spatial analysis, overlay data and integrate other systems and solutions. Geoprocessing operations facilitate linking or merging data, and of the spatial characteristics of the data; the search for particular characteristics or features in an area, the faster update of data and at a more reduced cost and the alternative access to data models (maps, graphs, address lists, reports and summary statistics) which may even be tailored to meet particular needs.


Furthermore, GIS features a number of operational advantages that have allowed the proliferation of new fields of endeavor in open access systems across multiple forms of acquisition, management, interpretation and spatial information analysis. This can be seen in the first item where a background and GIS starting point is explored. The main goal of this paper is to underwrite the concept of the evolution

of GIS and to identify new ways of accommodating recent scientific approaches with its vast range of application possibilities.

THEORETICAL BACKGROUND - THE STARTING POINT

GIS is the onset of a new stage of cartography. This type of system's evolution is relatively recent, between the 50s and 60s of the XX century, but knowledge and technology have rapidly grown recent years. The upsurge of technological systems with computerized cartographic applications arose from the need to solve certain problems, in such areas as the military and public administration. Many contributors and diverse influences, regarding concepts and principles, data and issues of spatial infrastructure, software promoters, areas of application, all allowed for its cohesive growth (Figure 1). The organizational structures of GIS are so diverse, along with its multitude of roots, opening up an array of software packages of both public and private domain (Hendriks, 2005). Nowadays, the applicability of this type of systems has widened to the commercial, non-profit and academic areas.

Figure 1. Timeline of major GIS events

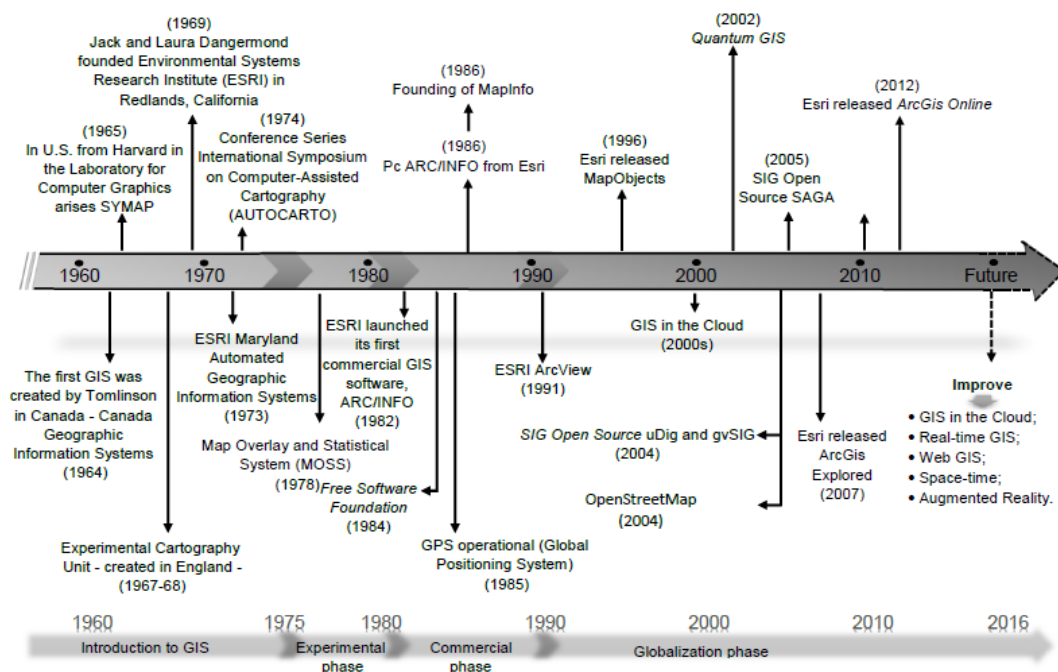

Source: Authors' own elaboration.

The mid 1960s witnessed the initial development of GIS in combining spatially referenced data, spatial data models and visualization. The actual roots of GIS are complex and difficult to determine (Miller & Goodchild, 2015).

Most authorities cite the Canada Geographic Information System (CGIS), designed around 1965, with a project led by Tomlinson (Bruno & Giannikos, 2015; Mordechai Haklay & Zafiri, 2008; Tomlinson, 1967). The objective was to obtain means for summaries and tabulations of areas of land from the Canada Land Inventory. For the registration of these lands, a massive federal-provincial effort was made to assess the use and potential of the Canadian land base. CGIS arose from the need to answer the challenges of accurately measuring the areas of irregular geographic patches of homogeneous utilization and to overlay/compare different themes (Goodchild, 2006).

The period of the 1970s was characterized by the rapid evolution, and ability of automatic computer mapping, the use of data format and the answering of a wide range of technical issues. In the 1980s, democratization of computer access allowed for the expansion of GIS use. These innovations led to the first commercial viability of GIS, it started to become popular as a standard computer application in government departments, universities, and private corporations. Accordingly, the ability to select, sort, extract, classify and display geographic data on the basis of complex topological and statistical criteria was available to users (M. Goodchild, 2006; Pourabbas, 2014).

The 1990s saw map analysis and modeling advances in GIS, turning these systems into real management information tools, as computing power also increased. During this decade, the Open GIS Consortium (OGC) was founded, with the objective of developing specific, publicly available, geoprocessing actions. OGC is an international industry consortium, which include government agencies and universities.

In 2000, the appearance of web 2.0 and, more recently, the Web 3.0 (the semantic web) allowed for the Open Source GIS to grow. Open source is a software that allows code source access to be open, free, to be distribute and modified. Nowadays, it is possible for programmers to add new functions very quickly and at a low cost due to recent GIS advances. Mobile and internet devices, cloud computing, NoSQL databases, Semantic Web, and Web services offer new ways of accessing, analyzing, and elaborating geospatial information

in both real-world and virtual spaces, both for open source and commercial GIS (Pourabbas, 2014).

Despite the progress made during the twenty-first century, there are still numerous challenges that lay ahead for geospatial sciences in various fields as shown in Table 1 (Yue *et al.*, 2013).

Table 1. The challenges for geospatial sciences for different types of data intensity

Intensity	Description
Data	Collect of a multitude of data from space by day and accumulation at a similarly high rate.
Processing	Intensive modes of processing information in different spatiotemporal spectra.
Competition	Action of a multitude of end users accessing parallel to information (reception of a large number of users simultaneously are possible, because of development of the several services (e.g., Google Maps and Bing Maps).
Spatiotemporal	A set of spatial and temporal dimension. It can be distinguished into two types of information – dynamic or static.

Source: Adapted from Yue *et al.*, 2013.

DATA ANALYSIS AND TREATMENT SYSTEMS

Common citizens are constantly asking questions regarding spatial dimension. A GIS can be defined as a computer system operated by people, which comprises of different aspects to be efficiently operated. Firstly, a GIS has the hardware, software and data components. Those multidimensional components can be articulated to give us the basis for the development of spatial analysis. However, human interaction is crucial to develop a conceptual model approach, to plan, to operate and to analyze the information. Nowadays, GIS may be very helpful to different company sizes, organizations and people where geographic patterns can be modelled and predicted. Spatial/Geographical data is representing real world through layers or objects where spatial positioning is crucial. Typical geographical data have descriptive or spatial information (Faiz & Krichen, 2012). It can be used to represent discrete data, typically through a vector-based representation (points, line polygons), or as a continuous data through a cell-based or raster mode that uses a matrix representation.

The most interesting part of a GIS project is the Spatial analysis (Heywood, Cornelius, & Carver, 2011). It is related with the to the ability to visual analysis of maps and imagery, computational analysis of geographic patterns, finding optimum routes, site selection, and advanced predictive modeling. The world is complex, but the exponential growth of technology, such as Global Position Systems (GPS), real time-sensors or GIS has made possible there simplification (ESRI, 2013). GIS are efficient tools for recording, exploiting, analyzing and displaying geographical data which can be applied in transportation, health, environment, urbanism, political activities, water/waste management, geomarketing, security, tourism, viticulture/ oenology, education or crime. These extensive types of applications covering both private and public sectors are briskly growing. Open-source and proprietary software development have been contributing to this development, due to its recent growth and recognition.

Apart from the rasters and vectors in spatial modeling, more recently three and four-dimensional data has also been investigated (Lin *et al.*, 2013). The interest in Virtual Geographic Environments (VGEs) has equally grown rapidly during the last years. It is characterized as being a bridge between the three scientific requirements of Geographic Information Science: multi-dimensional visualization, dynamic phenomenon simulation and public participation (Lin *et al.*, 2013).

GIS TRENDS

Currently, the key trends that face in GIS concerns are geospatial web, cloud GIS, space-time GIS, augmented reality and real-time GIS. Web-based in GIS combines information systems and geographic web technology (Chakraborty *et al.*, 2015). WebGIS is responsible for a paradigm shift in the production of geospatial data, going from a model based on national governments, as key players to the collaboration of public and private institutions. (Goodchild *et al.*, 2007; Grossner *et al.*, 2008). The enhanced participation of different actors in the generation of geospatial data, makes it increasingly difficult to distinguish the producers from the users (Budhathoki & Nedovic-Budic, 2008), mainly due to the availability of free software and open source tools (Crampton, 2009). With the opening of GIS to the world, a multitude of actors involved in mapping data on the web, allows one to help to solve end-user problems (Elwood, 2009). GIS

based on the web are accessible not only from a computer but also from different devices, including laptops, smartphones or tablets (Chakraborty, 2015).

The opening of the source code, and the use of free software aims to contribute to an increased openness, collective voluntary participation, study, use and modification of the software (Chakraborty *et al.*, 2015).

At the beginning of the 21st century, a new and leading geolocation-based service of crowdsourcing at a massive scale known as Open Street Map project (OSM) started on a massive scale. This project improves 'Volunteered Geographical Information' and aims at creating a free digital map of the world. These collaborative platforms are empowering citizens to create a global patchwork of geographic information (Goodchild, 2007; Haklay, 2010). The international non-profit Open Geospatial Consortium was founded in 1994. Is a voluntary organization which led the process of developing standards for geospatial and location services (Haklay *et al.*, 2008). Among the three most relevant standards OGC include: Web Feature Service (WFS), Web Map Service (WMS) and Web Coverage Service (WCS) (Giuliani *et al.*, 2016; Parker & Dominguez, 2015).

This new form of using GIS on the web environment using a distributed and asynchronous requires a client-server architecture (C/S). This is characterized by a client request of a service, such as mapping, decision analysis, data processing or storage data while the server provide the service (Mekonnen & Gorsevski, 2015). Web GIS exits benefited by providing the best agents solutions to problems that traditional GIS (Chang & Park, 2006). More recently, Web-GIS has become to a cloud GIS, based on the model of "Software as a Service" (SaaS) (Kerski, 2015).

Cloud computing are increasingly widespread and make possible to run cloud applications in a shared data center accessed by internet. The emergence of cloud GIS solved problems associated with the increase of precision and with the scope of spatial-temporal information. In general, there is an accumulation of multiple data records and this data set, varies on a daily basis (Hey, 2012) and allows network access to a set of configurable data (servers, storage, applications and services) (Yang *et al.*, 2011). The recent emergence cloud GIS provides the ability to build a GIS service enabled for use in the cloud and can be made to scale up or down according to user needs. GIS cloud is equipped with new

models of maintenance and use of geospatial data for a variety of users and to solve computing problems (Yu *et al.*, 2014). This service provides users the ability to act in the manner of 'pay-as-you-go'. This mechanism of action has been a dream for several decades and has recently become a reality (Armbrust *et al.*, 2010).

The GIS cloud has several characteristics namely: (i) software installation is not necessary; (ii) the computer's internal storage is not used; (iii) it enables collaborative action between different actors (flexibility); (iv) it adapts services to demand and actual charge capacity; (v) it enhances greater interoperability between various source codes; (vi) it decreases the time taken by decision-makers to implement deliberation processes' of and (vii) the implementation of the entire system on a scale of top-down (Armbrust *et al.*, 2010; Blower, 2010; Yu *et al.*, 2014). Cloud computing is a powerful technology that enables greater profitability in energy consumption and economic resources (Buyya *et al.*, 2009; Lee & Chen, 2010; Marston *et al.*, 2011). It performs massive-scale and complex computing and eliminates the need of maintaining software, hardware or dedicated space (Assunção *et al.*, 2015; Hashem *et al.*, 2015).

Associated with this is the tremendous growth of data generated, in scale and volume, which puts data processing challenges in terms of time and of task requirements (Hashem *et al.*, 2015). Regarding this Big Data, a concept specifying the four Vs is emerging, namely, volume of data, variety of data collectors, velocity of data transfers, and processes of value for the discovery of a large number of hidden data in large data sets (Gantz & Reinsel, 2011; Hashem *et al.*, 2015).

The advance of these technologies may enable the construction of spatial data infrastructures (SDI) and cyberinfrastructures (Schäffer, Baranski, & Foerster, 2010; Yang *et al.*, 2010). Some public cloud computing platforms are already available, including Microsoft Azure, Google App Engine or Amazon EC2. In any case a cloud can be public or private. The public cloud is available to the general public while a private cloud is only used within an organization. Despite the progress achieved in recent years and fundamental analysis is practical and real applications and support the conceptual analysis (Yue *et al.*, 2013).

Cloud computing includes multiple domains, such as energy and mineral sciences, weather, traffic and simulation management systems, landscape

ecology, water management, disaster management or human and environmental health (Yang *et al.*, 2013). According to these authors the main obstacles to the success of cloud GIS are associated with policy, management, acquisition and operational requirements. Looking ahead, multiple threads are identified:

- cumulative advances for interdisciplinary approaches, side by side in geoscience and digital earth;
- cloud interoperability standards based on OGC, OGF, NIST, ISO, IEEE and through a systemic architecture;
- integration of innovational interactive systems for viewing and access;
- real-time simulation for decision support;
- Security levels defined by a computer through a platform with distribution of certain information, and their collaboration with the integration of multiple platforms. It aims at the achievement of a science for the citizen, crowd sourcing and technology challenges for the dynamics of education.


Another type of evolution in GIS is linked to the Hägerstrand framework (space-time model). In this context, space-time studies individual patterns, considering the various constraints in a particular spatial-temporal environment (Hägerstrand, 1970; Hägerstrand, 1989). There have been a number of efforts to ensure the incorporation of concepts in a GIS (e.g., (M. F. Goodchild, 2013; Miller, 1991; Neutens *et al.*, 2007; Shaw & Yu, 2009). This system presents a three dimensional orthogonal structure that consists of the union between two spatial dimensions and a temporal dimension. The spatial dimensions, structured 2D scale, represent the location of individuals, while the dimension of time represents the timing of the individual movement in a spatiotemporal system (Miller, 2004).

Several variables can represent the characteristics of the daily activity of an individual: location, time, duration, sequence and frequency of the type of activities (Ren & Kwan, 2009). It must be associated with at least one activity. Distinguished two types of activities: the movable and stationary activity. Mobile activity refers to a local motion toward another, while the stationary activity leads

to a fixed location. Representation in Hägerstrand system is done in two ways: by vertical line segment when it comes to a stationary activity and a sloping straight line when there is movement toward a certain place (Chen *et al.*, 2011). In recent years, attempts have been incremented to store and manage the activities of an individual based on their spatial and temporal characteristics (Chen *et al.*, 2013; Wang & Cheng, 2001). This type of analysis has been mainly used in studies that assess individual accessibility (e.g., (Delafontaine, Neutens, Schwanen, & Van de Weghe, 2011; Kwan, 1998; Miller, 1999; Neutens, 2015; Neutens *et al.*, 2007). These studies demonstrate that the considerations of space-time contribute to the presentation of more complex models and real human activities (Shaw & Yu, 2009).

Real-Time GIS model was assumed as a new paradigm of information science to capture the real characteristics of human undertakings (Hey, 2012) and transforming historical changed data to real-time data (Gong, Geng, & Chen, 2015). The authors divided the model into three stages: temporal snapshots (1st stage), object-shift (2nd stage) and events and action (3rd stage) (Figure 2).

Figure 2. Three stages of real-time models

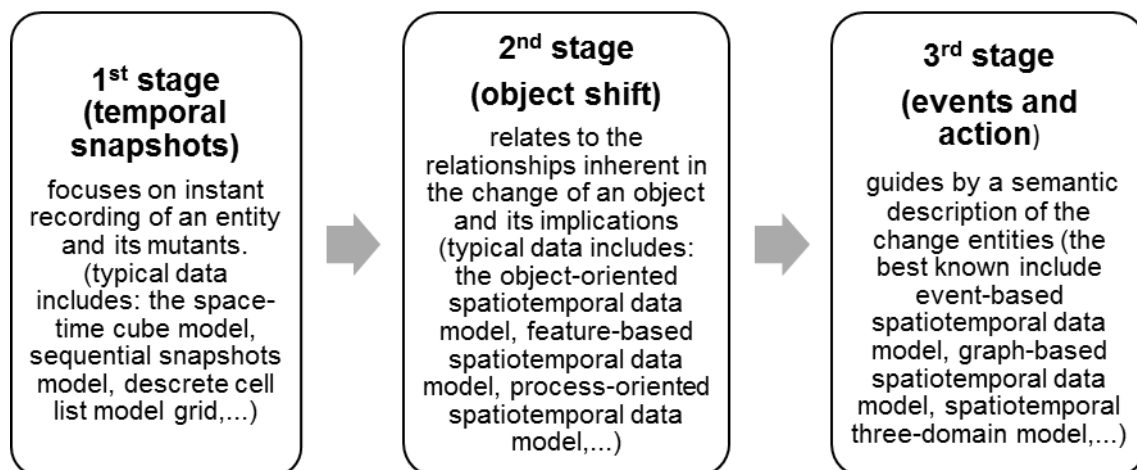

Source: Adapted from Gong *et al.* (2015).

Real-Time GIS analyses have also sought to incorporate collaborative functions. These types of tools can be differentiated into several types, namely: the same time - same place; same time - different location; different time - same place; different time - different location (Sun & Li, 2015). The Real-Time Collaborative

Geographic Information System (RCGIS) enables analysis of interactions in agile and flexible systems, equipped with collaborative principles.

The unprecedented growth of geographically referenced information combined with the recent digital augmentation reality (AR) of places growth will become increasingly important in the future (Graham, Zook, & Boulton, 2013). AR had its recognition in 1992, when Caudell and Mizzel developed works for Boeing and designed a digital transport display in the head, so as to enable a framework of airplane schemes (Yew *et al.*, 2016). However, the concept of air is much older. This was used during the II World War period of with a project developed with the presentation of information on the camera's windshield. In this sense, there must be a relationship between reality and the information made available on digital media. For this, there must be a technological device (smartphone or other wireless equipment), tracking and computer software. AR is summarized in three distinct properties: (1) the combination of real and virtual objects in the real world; (2) to run interactively in real time; and (3) the registration of real and virtual objects and their connection (Azuma, 1997). AR has received several applications for PC, smart phones, tablet and other devices and will it will increase in the future.

These advances in several types of GIS technologies may create significant digital divisions, disadvantaging the poor, ethnic and racial minorities and rural area residents. Open source applications create exclusion to those who can only see and contribute with these features (Elwood, 2009).

FUTURE RESEARCH DIRECTIONS

Information technology and Geographic Science are growing shoulder to shoulder and rapidly. Development of GIS technology and applications must grow behind the scope of Big Data, Cloud GIS, Real-time GIS and Augmented Reality challenges. For future research, a more rigorous approach should be implemented and guided by, technology interoperability, integrated multidisciplinary approach, security, understanding how to integrate citizens collected data and deeply understand, how to collect and analyze real time data. The occurrence of data needed will be exceeded by the abundance of real time data leading to the challenges on of how to detach different sources to canvass

their quality and include them in spatial analysis. For this, more thorough and integrated analysis models are required and at the same time, more spread applications by multiple technological devices will be required, to provide the spatial information.

CONCLUSIONS

The expansion and advances of GIS technology has created the necessary conditions to proliferate different working approaches in multiple areas, such as geography, cartography, remote sensing, image processing, education or environmental sciences. This section presents the evolution of GIS from its conception to the present day/ time. Moreover, it shows the main challenges posed by multiple skills acquired by the GIS in recent decades, namely presenting a shift from traditionally confined public planning areas to multi collaborate users, from desktop to the web and from real to virtual and augmented reality. In fact, maps have always been used for the removal of political borders, but today, networking abilities has generated conditions for GIS intelligence statements. The development of the web has supported new challenges associated with GIS, particularly in areas connected with augmented reality, real-time GIS information, GIS space-time or Cloud GIS. Associated to this increase, Big Data challenges and Geographic Science (GS) problems are visible. The cumulative advances in the relationship between GIS and Web can hence contribute to the expansion of generated and manipulated information, the interoperability between servers, users and networking. Geographic information will reinforce its position in our daily life and for GS, these trends will be more than ever, an eye catcher for further research.

REFERENCES

Armbrust, M., Fox, A., Griffith, R., Joseph, A. D., Katz, R., Konwinski, A., Lee, G., Patterson, D., Rabkin, A., Stoica, I., & Zaharia, M. (2010). A view of cloud computing. *Communications of the ACM*, 53(4), 50-58.

Assunção, M. D., Calheiros, R. N., Bianchi, S., Netto, M. A. S., & Buyya, R. (2015). Big Data computing and clouds: Trends and future directions. *Journal of Parallel and Distributed Computing*, 79–80, 3-15.

Azuma, R. T. (1997). A survey of augmented reality. *Presence: Teleoperators and virtual environments*, 6(4), 355-385.

Bernhardsen, T. (2002). *Geographic information systems: an introduction* (3rd ed.). New York: John Wiley & Sons.

Blower, J. D. (2010). *GIS in the cloud: implementing a web map service on Google App Engine*. Paper presented at the Proceedings of the 1st International Conference and Exhibition on Computing for Geospatial Research & Application.

Bruno, G., & Giannikos, I. (2015). Location and GIS *Location Science* (pp. 509-536): Springer

Budhathoki, N. R., & Nedovic-Budic, Z. (2008). Reconceptualizing the role of the user of spatial data infrastructure. *GeoJournal*, 72(3-4), 149-160.

Buyya, R., Yeo, C. S., Venugopal, S., Broberg, J., & Brandic, I. (2009). Cloud computing and emerging IT platforms: Vision, hype, and reality for delivering computing as the 5th utility. *Future Generation computer systems*, 25(6), 599-616.

Chakraborty, D., Sarkar, D., Agarwal, S., Dutta, D., & Sharma, J. R. (2015). Web Based GIS Application using Open Source Software for Sharing Geospatial Data. *International Journal of Advanced Remote Sensing and GIS*, 4(1), pp. 1224-1228.

Chang, Y. S., & Park, H. D. (2006). XML Web Service-based development model for Internet GIS applications. *International Journal of Geographical Information Science*, 20(4), 371-399.

Chen, B. Y., Li, Q., Wang, D., Shaw, S.-L., Lam, W. H., Yuan, H., & Fang, Z. (2013). Reliable space–time prisms under travel time uncertainty. *Annals of the Association of American Geographers*, 103(6), 1502-1521.

Chen, J., Shaw, S.-L., Yu, H., Lu, F., Chai, Y., & Jia, Q. (2011). Exploratory data analysis of activity diary data: a space–time GIS approach. *Journal of Transport Geography*, 19(3), 394-404.

Crampton, J. W. (2009). Cartography: maps 2.0. *Progress in Human Geography*, 33(1), 91.

Crossland, M. D. (2005). Geographical Information Systems as Decision Tools. In M. Khosrow-Pour (Ed.), *Encyclopedia of Information Science and Technology, First Edition* (Vol. 2, pp. 1274-1277). USA: Idea Group Reference

Delafontaine, M., Neutens, T., Schwanen, T., & Van de Weghe, N. (2011). The impact of opening hours on the equity of individual space–time accessibility. *Computers, environment and urban systems*, 35(4), 276-288.

Elwood, S. (2009). Integrating participatory action research and GIS education: Negotiating methodologies, politics and technologies. *Journal of Geography in Higher Education*, 33(1), 51-65.

ESRI. (2013). *The language of spatial analysis*. New York: ESRI Press.

Faiz, S., & Krichen, S. (2012). *Geographical information systems and spatial optimization*: CRC Press.

Gantz, J., & Reinsel, D. (2011). Extracting value from chaos. *IDC iview*, 1142, 1-12.

Giuliani, G., Guigoz, Y., Lacroix, P., Ray, N., & Lehmann, A. (2016). Facilitating the production of ISO-compliant metadata of geospatial datasets. *International Journal of Applied Earth Observation and Geoinformation*, 44, 239-243.

Gong, J., Geng, J., & Chen, Z. (2015). Real-time GIS data model and sensor web service platform for environmental data management. *International journal of health geographics*, 14(1), 1.

Goodchild, M. (2006). Geographic Information Systems. In S. Aitken & G. Valentine (Eds.), *Approaches to Human Geography* (Vol. 251-262). USA: SAGE Publications

Goodchild, M. (2007). Citizens as sensors: the world of volunteered geography. *GeoJournal*, 69(4), 211-221.

Goodchild, M. F. (2013). Prospects for a space–time GIS: Space–time integration in geography and GIScience. *Annals of the Association of American Geographers*, 103(5), 1072-1077.

Goodchild, M. F., Yuan, M., & Cova, T. J. (2007). Towards a general theory of geographic representation in GIS. *International journal of geographical information science*, 21(3), 239-260.

Graham, M., Zook, M., & Boulton, A. (2013). Augmented reality in urban places: contested content and the duplicity of code. *Transactions of the Institute of British Geographers*, 38(3), 464-479.

Grossner, K. E., Goodchild, M. F., & Clarke, K. C. (2008). Defining a digital earth system. *Transactions in GIS*, 12(1), 145-160.

Hägerstraand, T. (1970). What about people in regional science? *Papers in regional science*, 24(1), 7-24.

Hägerstrand, T. (1989). *Reflections on "what about people in regional science?"*. Paper presented at the Papers of the Regional Science Association.

Haklay, M. (2010). How Good is Volunteered Geographical Information? A Comparative Study of OpenStreetMap and Ordnance Survey Datasets. *Environment and Planning B: Planning and Design*, 37(4), 682-703.

Haklay, M., Singleton, A., & Parker, C. (2008). Web mapping 2.0: The neogeography of the GeoWeb. *Geography Compass*, 2(6), 2011-2039.

Haklay, M., & Zafiri, A. (2008). Usability engineering for GIS: learning from a screenshot. *The Cartographic Journal*, 45(2), 87-97.

Hashem, I. A. T., Yaqoob, I., Anuar, N. B., Mokhtar, S., Gani, A., & Ullah Khan, S. (2015). The rise of "big data" on cloud computing: Review and open research issues. *Information Systems*, 47, 98-115.

Hendriks, P. H. (2005). Space opera-GIS basics. In M. Khosrouw-Pour (Ed.), *Encyclopedia of Information Science and Technology* (Vol. 5, pp. 2571-2575). USA: Idea Group Reference

Hey, T. (2012). The Fourth Paradigm—Data-Intensive Scientific Discovery *E-Science and Information Management* (pp. 1-1): Springer

Heywood, I., Cornelius, S., & Carver, S. (2011). *An Introduction to geographical Information systems* (4th ed.). Essex: Pearson Education.

Kerski, J. J. (2015). Geo-awareness, Geo-enablement, Geotechnologies, Citizen Science, and Storytelling: Geography on the World Stage. *Geography Compass*, 9(1), 14-26.

Kwan, M.-P. (1998). Space-time and integral measures of individual accessibility: A comparative analysis using a point-based framework. *Geographical Analysis*, 30(3), 191-216.

Lee, Y.-T., & Chen, K.-T. (2010). *Is server consolidation beneficial to MMORPG? A case study of World of Warcraft*. Paper presented at the Cloud Computing (CLOUD), 2010 IEEE 3rd International Conference.

Lin, H., Chen, M., Lu, G., Zhu, Q., Gong, J., You, X., Wen, Y., Xu, B., & Hu, M. (2013). Virtual Geographic Environments (VGEs): A New Generation of Geographic Analysis Tool. *Earth-Science Reviews*, 126, 74-84.

Marston, S., Li, Z., Bandyopadhyay, S., Zhang, J., & Ghalsasi, A. (2011). Cloud computing—The business perspective. *Decision support systems*, 51(1), 176-189.

Mekonnen, A. D., & Gorsevski, P. V. (2015). A web-based participatory GIS (PGIS) for offshore wind farm suitability within Lake Erie, Ohio. *Renewable and Sustainable Energy Reviews*, 41, 162-177.

Miller, H. J. (1991). Modelling accessibility using space-time prism concepts within geographical information systems. *International Journal of Geographical Information System*, 5(3), 287-301.

Miller, H. J. (1999). Measuring space-time accessibility benefits within transportation networks: basic theory and computational procedures. *Geographical analysis*, 31(1), 1-26.

Miller, H. J. (2004). Tobler's first law and spatial analysis. *Annals of the Association of American Geographers*, 94(2), 284-289.

Miller, H. J., & Goodchild, M. F. (2015). Data-driven geography. *GeoJournal*, 80(4), 449-461.

Neutens, T. (2015). Accessibility, equity and health care: review and research directions for transport geographers. *Journal of Transport Geography*, 43, 14-27.

Neutens, T., Witlox, F., Van De Weghe, N., & De Maeyer, P. (2007). Space–time opportunities for multiple agents: a constraint-based approach. *International Journal of Geographical Information Science*, 21(10), 1061-1076.

Parker, R., & Dominguez, J. (2015). Features to Look for in a GIS Viewer. *Geoinformatics*, 18(4), 24.

Pourabbas, E. (2014). *Geographical Information Systems: Trends and Technologies*. Boca Raton: CRC Press.

Ren, F., & Kwan, M.-P. (2009). The impact of the Internet on human activity–travel patterns: analysis of gender differences using multi-group structural equation models. *Journal of Transport Geography*, 17(6), 440-450.

Schäffer, B., Baranski, B., & Foerster, T. (2010). Towards spatial data infrastructures in the clouds *Geospatial Thinking* (pp. 399-418): Springer

Shaw, S.-L., & Yu, H. (2009). A GIS-based time-geographic approach of studying individual activities and interactions in a hybrid physical–virtual space. *Journal of Transport Geography*, 17(2), 141-149.

Sun, Y., & Li, S. (2015). Real-time collaborative GIS: A technological review. *ISPRS Journal of Photogrammetry and Remote Sensing*.

Tomlinson, R. (1967). An introduction to the geo. information system of the Canada Land Inventory. *Ottawa, Department of Forestry and Rural Development, ARDA*.

Wang, D., & Cheng, T. (2001). A spatio-temporal data model for activity-based transport demand modelling. *International Journal of Geographical Information Science*, 15(6), 561-585.

Yang, C., Goodchild, M., Huang, Q., Nebert, D., Raskin, R., Xu, Y., Bambacus, M., & Fay, D. (2011). Spatial cloud computing: how can the geospatial sciences use and help shape cloud computing? *International Journal of Digital Earth*, 4(4), 305-329.

Yang, C., Raskin, R., Goodchild, M., & Gahegan, M. (2010). Geospatial cyberinfrastructure: past, present and future. *Computers, Environment and Urban Systems*, 34(4), 264-277.

Yang, C., Xu, Y., & Nebert, D. (2013). Redefining the possibility of digital Earth and geosciences with spatial cloud computing. *International Journal of Digital Earth*, 6(4), 297-312.

Yew, A., Ong, S., & Nee, A. (2016). Towards a griddable distributed manufacturing system with augmented reality interfaces. *Robotics and Computer-Integrated Manufacturing*, 39, 43-55.

Yu, G., Zhang, S., Yu, Q., Fan, Y., Zeng, Q., Wu, L., Zhao, P. (2014). Assessing ecological security at the watershed scale based on RS/GIS: a case study from the Hanjiang River Basin. *Stochastic environmental research and risk assessment*, 28(2), 307-318.

Yu, M., Fu, P., Zhou, N., & Xia, J. (2014). ArcGIS in the cloud. In Z. Li, C. Xu & K. Liu (Eds.), *Spatial Cloud Computing. A practical approach*. Boca Raton: CRC Press

Yue, P., Zhou, H., Gong, J., & Hu, L. (2013). Geoprocessing in Cloud Computing platforms—a comparative analysis. *International Journal of Digital Earth*, 6(4), 404-425.

KEY TERMS AND DEFINITIONS

Augmented Reality – Augmented Reality (AR) into GIS assures the link between the perception of the user and the relationship with the real world. The real world is represented with 2D and 3D virtual information. The computer augments the actual landscape, with additional information that can be supported by inserting fields based on GIS applications.

Cloud GIS– is based on the integrated web systems. The data generates maps to support the analysis and optimization of real time operations. Cloud integration helps the organization of complex work flows and the maintenance of extensive geo databases.

Web-based GIS – is based on a form of distributed information. This category of technological services is part of a communication structure, existing between the GIS server and the client. Their relationship is expressed through URLs (created by the server) and HTTP (for the customer). Spatial data access, advanced

mapping and spatial analysis are the most common types of analysis options on Web-based GIS.

Crowd sourcing – is the act of the user performing the GIS task on a voluntary basis for a set of users. This type of action is based on a bottom-up approach. It is associated with the creation of data via a dynamic group. The crowd sourced data collection is carried out using portable devices (GPS, PC, mobile phones) and the data is synchronized on the central database, accessible and shareable, based on web maps and services.

Real-Time – is a term often used to describe the execution time of a task. This tool helps users to obtain more frequent and efficient monitoring. GIS technology enables the sharing of a series of real-time data. Among the main features are, visualization, analysis and the understanding of phenomena in a reduced timescale.

Space-time – is suggested in Hägerstrand's framework of time-geographic. It presents and analyses individual activities in time and space dimensions. GIS environment results in the spatial representation of dimension x and y and temporal dimensions of time in hours, minutes or seconds. The space-time patch is used for the implementation of the daily trajectory of the individual in time and space.

GIS – is a system that permits one to visualize, analyze, display and understand the relationships between spatial phenomena. Nowadays, GIS is capable of transforming large numbers of data, to analyze and momentarily transform, replace data and generate charts, graphs, summaries and descriptive statistics. Amongst the main key elements to a noble GIS are: computer hardware and software, operational context (people and organizations) and internet service.